



FUTEK MODEL LAU200

Drawing Number: **F11047-B**



INCH [mm] R.O.= Rated Output

WIRING CODE (CC1)			
+Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE
1	4	2	3

ACCELERATOR AND PEDAL FORCE SENSOR

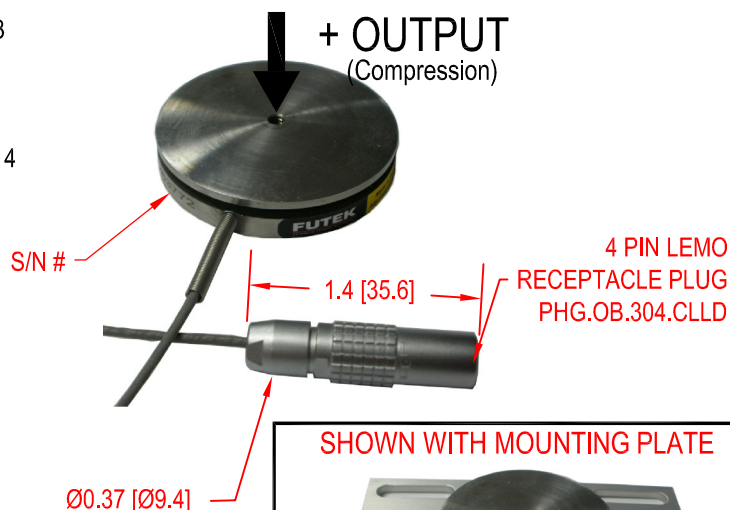

SHOWN WITH MOUNTING PLATE

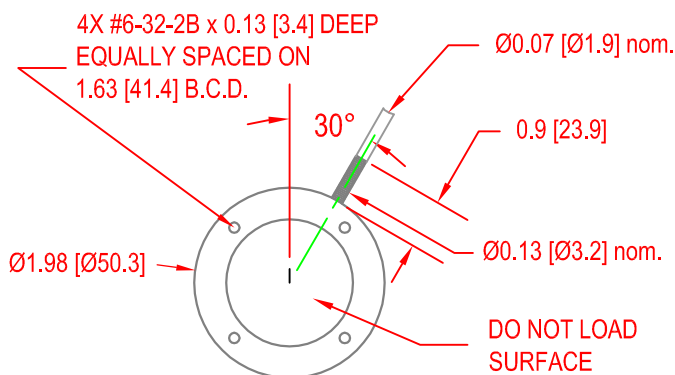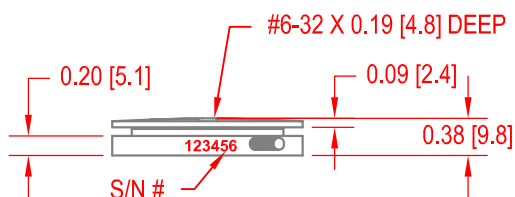

MODEL LAU200 INCLUDES
(ONE OF EACH)
TOTAL WEIGHT 2 lb [0.9 Kg]

ITEM#MCP00180 - MOUNTING PLATE
100 KOHM SHUNT CAL.
CARRYING CASE AND
ITEM#FSH00173 - (mating connector and 10 ft cable)

SPECIFICATIONS:


RATED OUTPUT 2 mV/V nom.
SAFE OVERLOAD 150% of R.O.
ZERO BALANCE $\pm 1\%$ of R.O.
EXCITATION (VDC OR VAC) 20 MAX
BRIDGE RESISTANCE 700 Ω nom.
OFF CENTER LOADING $\pm 3-4\%$ OR BETTER @ 0.625 [15.9] FROM CENTER
NONLINEARITY $\pm 0.2\%$ of R.O.
HYSTERESIS $\pm 0.2\%$ of R.O.
NONREPEATABILITY $\pm 0.2\%$ of R.O.
TEMP. SHIFT ZERO $\pm 0.01\%$ of R.O./°F [0.018% of R.O./°C]
TEMP. SHIFT SPAN $\pm 0.01\%$ of LOAD/°F [0.018% of LOAD/°C]
COMPENSATED TEMP. 60 to 160°F [15 to 72°C]
OPERATING TEMP. -60 to 200°F [-50 to 93°C]

WEIGHT 6 oz [170 g]
MATERIAL 17-4PH S.S.
MATERIAL (MOUNTING PLATE) Aluminum Red Anodized after S/N: 395536
DEFLECTION 0.005 to 0.009 [0.127 to 0.229] nom.
CABLE: #29 AWG, 4 Conductor, Spiral Shielded Teflon Cable
12 in (0.3 m) Long with 4 Pin Lemo Receptacle (EGG.OB.304.CLL)


ACCESSORIES AND RELATED INSTRUMENTS AVAILABLE
5 pt. COMPRESSION; 100 K Ω SHUNT CAL VALUE
CALIBRATION TEST EXCITATION 10 VDC
CALIBRATION (STD)

CAPACITIES		
ITEM #	lb	N
FSH00218	10	44.5
FSH00219	25	111
FSH00220	50	222
FSH00221	100	445
FSH00222	300	1334

TYPICAL APPLICATION

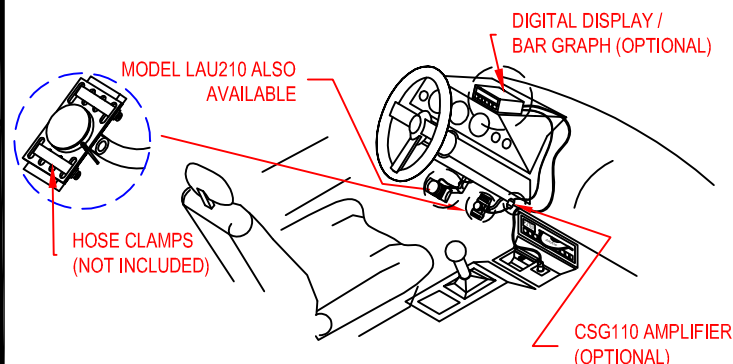

MOUNTING PLATE (Aluminum, Clear Anodized)

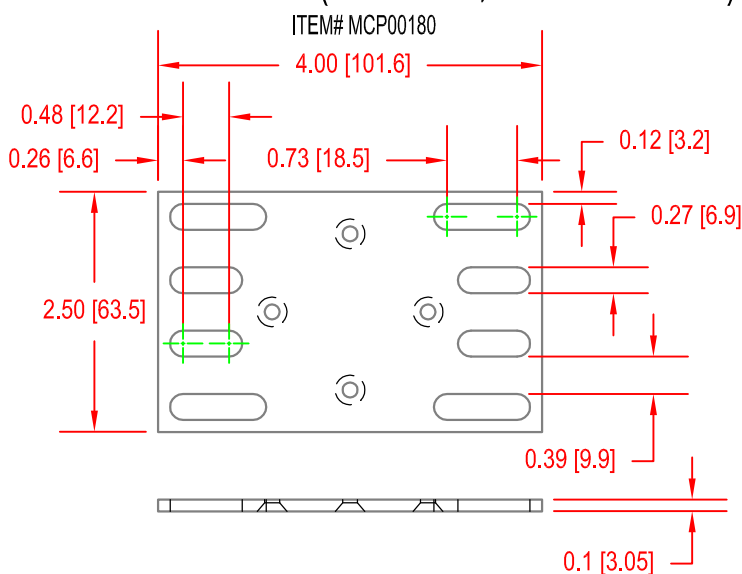

FUTEK
ADVANCED SENSOR TECHNOLOGY, INC.

This drawing is submitted solely for the information and exclusive use of the original addressee. It is not to be divulged in whole or in part, by any firm or individual without written permission from FUTEK
CAGE CODE # 1X8M6

10 THOMAS
IRVINE, CA 92618 USA
1-800-23-FUTEK (38835)

INTERNET:
<http://www.futek.com>