



**FEATURES**

- Various capacities from 0-250 lb
- Miniature size, ideal for tight spaces.
- Quick response with low deflection.
- Low power consumption.

 Non-loading surface, do not contact

 Active End

 Fixed End

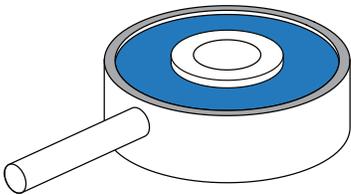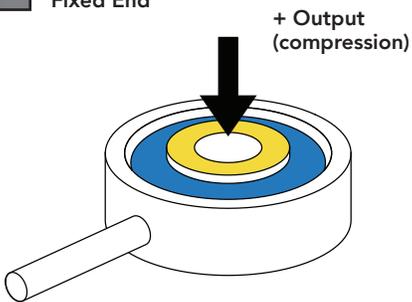**SPECIFICATIONS****PERFORMANCE**

Nonlinearity See table

Hysteresis See table

Nonrepeatability $\pm 0.1\%$ of RO

ELECTRICAL

Rated Output (RO) See table

Excitation (VDC or VAC) 12 max

Bridge Resistance 1000 Ohm nom

Insulation Resistance ≥ 500 MOhm @ 50 VDC

Connection 34 Awg 4 Conductor Braided Polyester Cable
5 ft [1.5m] Long

Wiring/Connector Code WC1

MECHANICAL

Capacities See table

Weight (approximate) 0.02 lb [9.1 g]

Safe Overload 150% of RO

Deflection 0.0006 in [0.015 mm] Nom.

Material 17-4 PH stainless-steel

IP Rating IP64

TEMPERATURE

Operating Temperature -60 to 200°F (-51 to 93°C)

Compensated Temperature 60 to 160°F (15 to 71°C)

Temperature Shift Zero $\pm 0.02\%$ of RO/°F ($\pm 0.036\%$ of RO/°C)

Temperature Shift Span $\pm 0.02\%$ of Load/°F ($\pm 0.036\%$ of Load/°C)

CALIBRATION

Calibration Test Excitation 5 VDC

Calibration (standard) 5-pt Compression

Shunt Calibration Value See table



CONFORMITY

RoHS EU 2015/863

CE EN55011; EN61326-1

DIMENSIONS inches [mm]

TOLERANCE:
 .X ± 0.1" [2.5]
 .XX ± 0.01" [0.25]
 .XXX ± 0.005" [0.127]

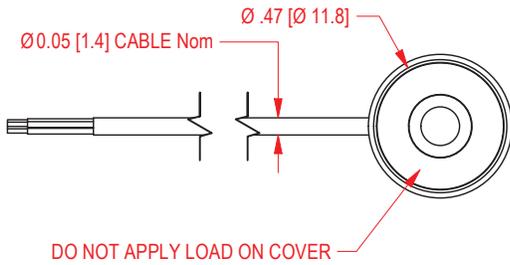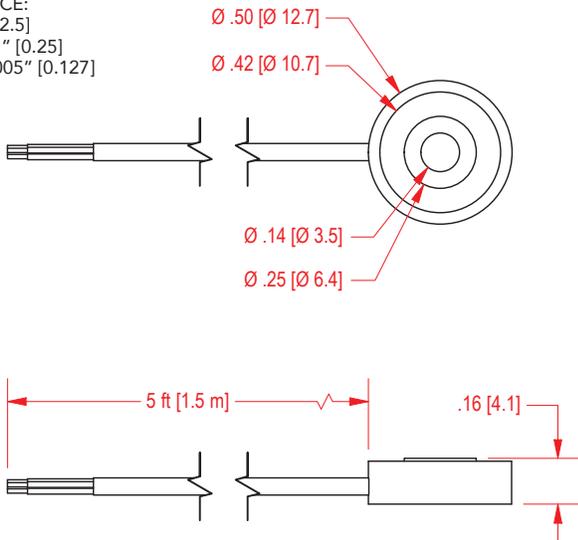


CAPACITIES

Lb	N	Rated Output (mV/V) nom	Non-linearity (% of RO)	Hysteresis (% of RO)	Shunt Value (K ohm)	Natural Frequency (kHz)
5	22	1	±0.5	±0.5	301	11
10	44	2	±0.5	±0.5	150	11
25	110	2	±0.6	±0.6	150	19
50	220	2	±0.6	±0.6	150	28
100	450	2	±0.6	±0.6	150	39
150	670	2	±0.6	±0.6	150	45
250	1100	2	±0.6	±0.6	150	52

WIRING CODE (WC1 WITH SHIELD)

RED	+ EXCITATION
BLACK	- EXCITATION
GREEN	+ SIGNAL
WHITE	- SIGNAL
SHIELD	FLOATING

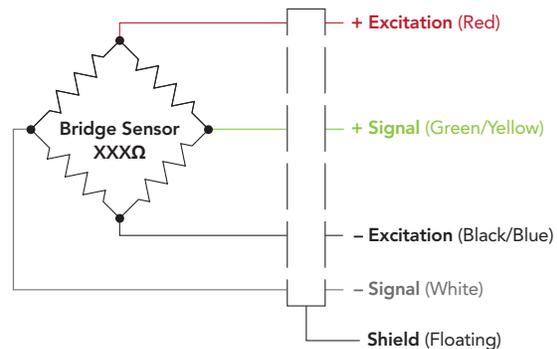

Note: While torquing bolts, high tension forces will occur during installation, which could result in overloading the sensor. FUTEK recommends connecting the sensor to a system in order to monitor the applied forces. FUTEK is not liable or responsible for the mishandling of the sensor during installation.

Drawing Number: FI1582

FUTEK reserves the right to modify its design and specifications without notice. Please visit <http://www.futek.com/salesterms> for complete terms and conditions.

The information provided herein was developed using FEA analysis, empirical data and multiple testing simulations. FUTEK presents the information in good faith and believes it is correct but makes no representations or warranties as to the completeness or accuracy of the information provided. User's application may produce different data and/or results. By using this information, you agree that you have read and understand this disclosure. Please contact us to discuss your particular application and needs.